

# TA®

## AL53053

### ASSEMBLY\_INSTRUCTION


**Pg**: 1/1 Ver: 01

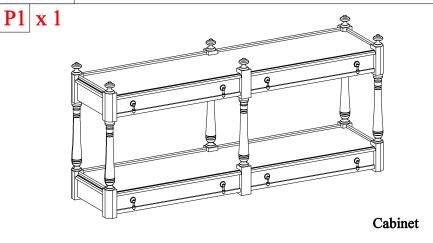



### **INSTRUCTIONS:**

- 1. Turn the cabinet (P1) backside down and put the cabinet top on softmaterial.
- 2. Assemble the legs (P2) to the cabinet (P1) and turn it clockwise direction securely, refer *detail 'A'*.
- 3. Turn the cabinet upright. Item is ready to use. (Adjust glider for the cabinet levelling if necessary refer *detail 'B'*)

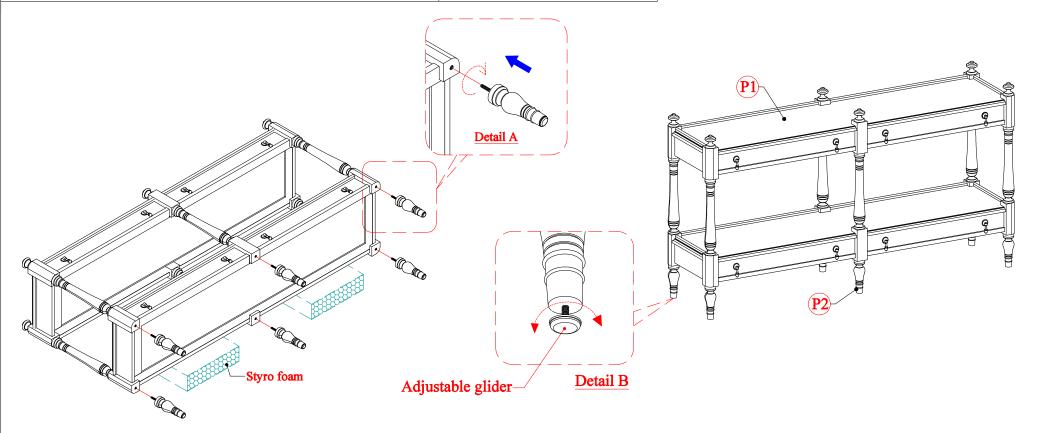



### AL53053

### LOCATION OF ANTI-TIP-KIT ASSEMBLY INSTRUCTION

Position for install bracket

**Pg**: 2/2 Ver: 01

#### ANTI TIP KIT INSTALLATION INSTRUCTION

- Attach brackets to the top back frame of the furniture and secure with short-screws.
- Determine the final position of the furniture piece and mark locations on the wall approximately 2" below the brackets mounted at the back of the furniture.
- Drill a hole into the wall stud. If wall stud is not available, drill a hole into the solid wall and insert plastic anchor and gently tap the anchor until the flange is flush in the wall surface.
- 4. Attach the second set of brackets by inserting the long-screws through the bracket holes and into the wall.
- Align the brackets at the back of furniture with the brackets in the wall.
- 6. Attach the Galvanized Steel Cable to the bracket and secure with clevis pin and hitch pin.

