

P1 X1


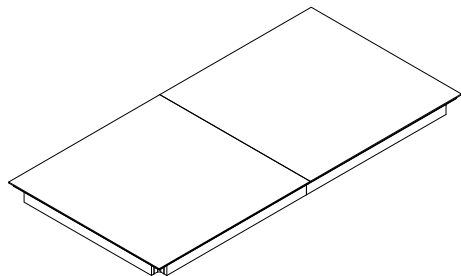


Table top

P2 X 2




Leaf

P3 X 4



Leg

P4 X 2




Large wooden lock

P5 X 2




Small wooden lock




Steel allen open wrench



01 X1



Steel allen bolt , washer & lock

02 X 8

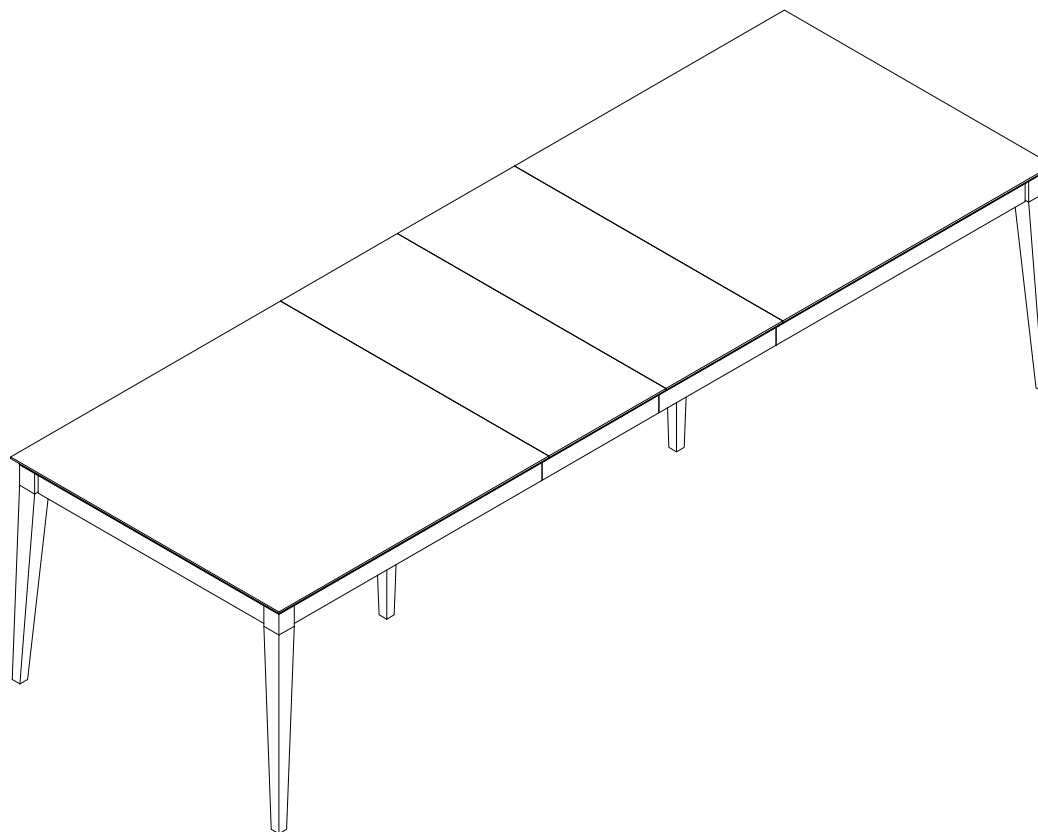

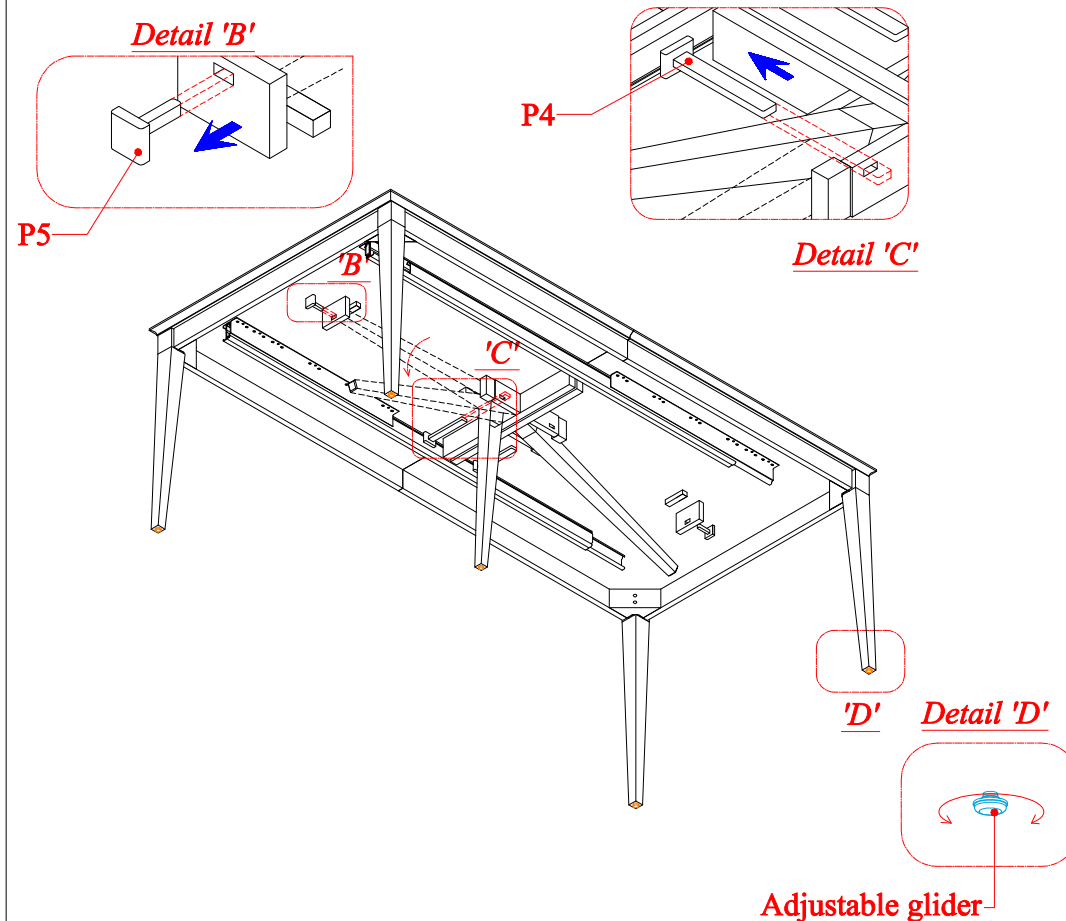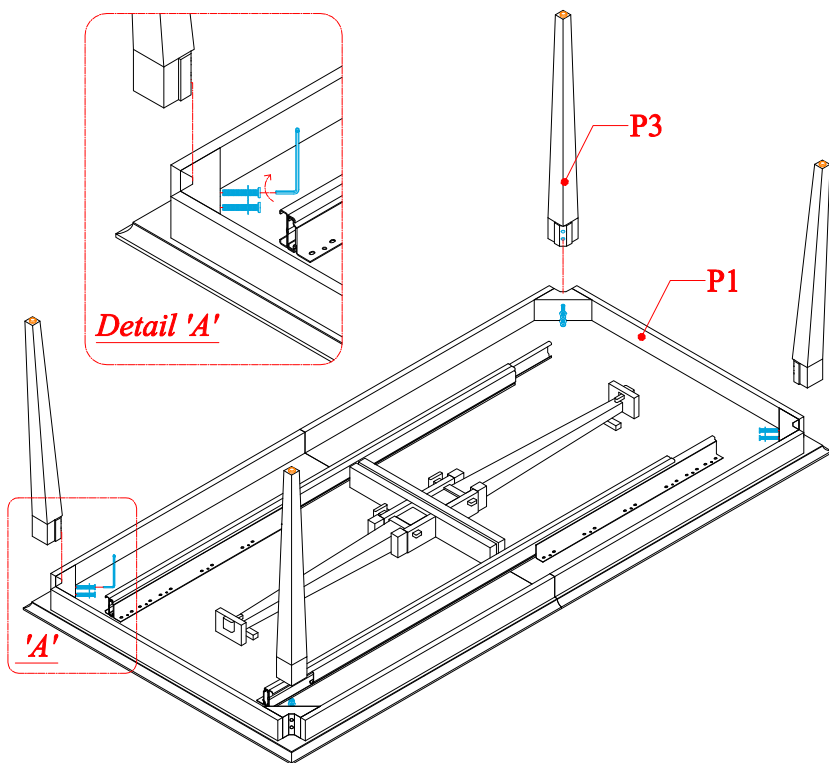


INSTRUCTIONS :

1. Place the table top (P1) on soft surface or carton sheet free . Assemble the leg (P3) to the table top (P1) . Then insert steel allen bolt , washer & lock , use steel allen open wrench to turn clockwise direction securely refer detail 'A'.
2. Turn the table upright position. The table is ready to use.
(Adjust glider for the table levelling if necessary refer detail 'D')

3. For extend the table top (P1), detach the wooden lock (P4) & (P5) secured the center support leg detail 'B' & 'C'. and then carefully turn the center support leg down.

WHEN OPEN LEAF

- Open the lock of top panel (P1), then open the top panel arrow guide. Refer detail 'E'.
- Put the leaf panel (P2) to the top panel as per , then close the top panel arrow guide and close the lock. Refer detail 'F'.

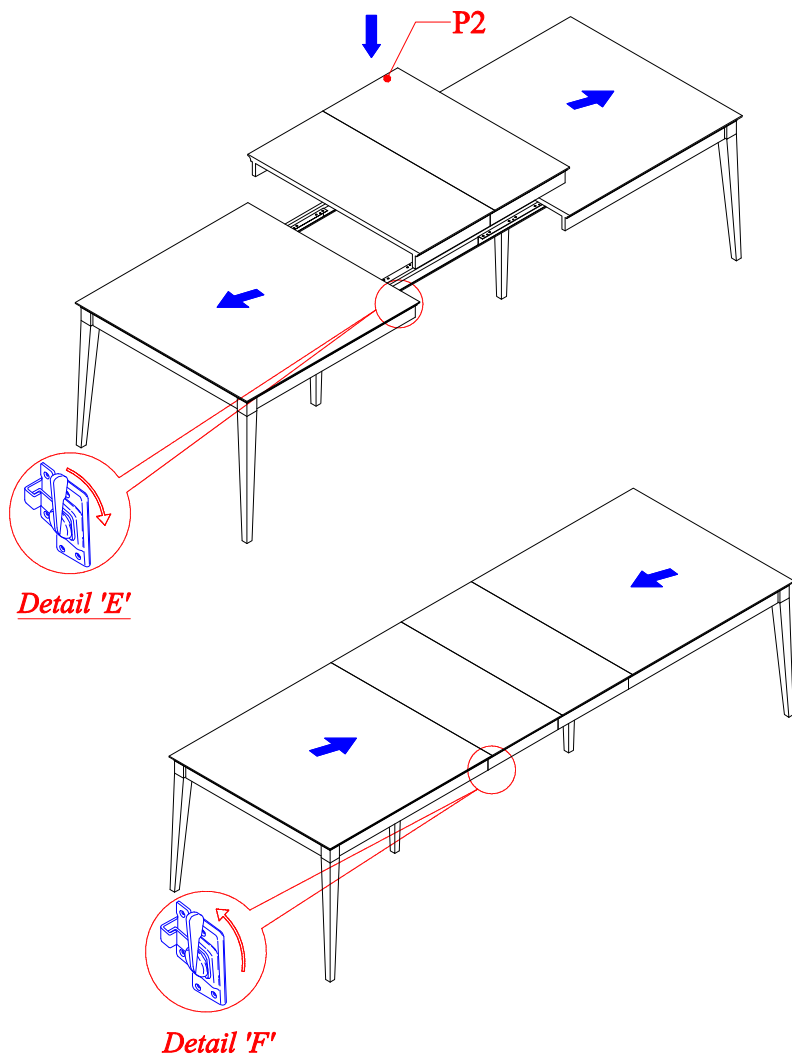

WHEN CLOSE LEAF

- Open the lock of top panel (P1) and the leaf (P2), then open the top panel arrow guide. Refer detail 'G'.
- Detach the leaf panel (P2) out the top panel. Then close the top panel arrow guide and close the lock. Refer detail 'H'.

